

REVOLUTIONIZING ROADWORK

Offset Vibratory Roller Attachment vs. Self-Propelled Compaction Rollers



! ELIMINATES ROLLOVER RISK

The patented design features an offset arm that keeps operators on flat ground while rolling and compacting shoulders and ditches. This increases crewmember safety while minimizing worker's comp claims.

COMPACT DESIGN

Attachments are compact enough to fit on a standard trailer with the host machine, no special permits required.

1/5TH THE WEIGHT

Attachments offer the same compaction pounds/cubic foot as traditional methods without the weight.

MAXIMUM COMPATIBILITY

Connect to equipment you already own with SAE quick connector couplings. Additionally, three interchangeable drum size widths provide heightened flexibility to compact topsoil, crushed stone, hot mix asphalt and more.

HEIGHTENED COMPACTION

A federal study showed that compaction attachments offer virtually the same density as self-propelled machines at half the variance.


MINIMAL MAINTENANCE

No onboard engine, transmission or hydraulic pump to routinely maintain.



Offset Vibratory Roller

Crew member safety is the highest priority on any jobsite. Traditional compaction machines require operators to navigate steep side slopes and uneven terrain, increasing the chance of rollovers. Our patented compaction attachment protects your crew by offsetting the drum, enabling operators to safely drive on flat surfaces while effectively compacting road shoulders and trenches — no matter the angle.

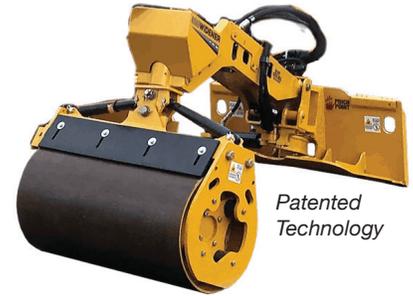

Features & Benefits:

- ✓ Optimal compaction of stone, asphalt, RAP or dirt
- ✓ Offset arm provides unrivaled operator safety
- ✓ Three interchangeable drum width sizes: 2-, 3- and 4-foot widths
- ✓ 90% less maintenance
- ✓ Compaction rate of 2,500-3,500 VPM (42-58Hz)
- ✓ 50% less labor
- ✓ Up to 30-degree drum pivot
- ✓ Drum reaches 30 inches below mounting point
- ✓ Remote control capability by host machine operator

SPECIFICATIONS

	2 Foot Width	3 Foot Width	4 Foot Width
Overall Length	9 ft (274.32 cm)	9 ft (274.32 cm)	9 ft (274.32 cm)
Overall Width	4 ft (121.92 cm)	4 ft (121.92 cm)	4.5 ft (137.16 cm)
Overall Height	6.25 ft (190.5 cm)	6.25 ft (190.5 cm)	6.25 ft (190.5 cm)
Arm Weight	779 lb (353 kg)	779 lb (353 kg)	779 lb (353 kg)
Drum Width	2 ft (61 cm)	3 ft (91.4 cm)	4 ft (121.9 cm)
Drum Mass	625 lb (283 kg)	847 lb (384 kg)	1003 lb (455 kg)
Amplitude	0.01 in (0.47 cm)	0.01 in (0.47 cm)	0.02 in (0.58 cm)
VPM	500 - 2,500	500 - 2,500	500 - 2,500

ROADWIDENER®

514 Wells Street Suite 1-W
Delafield, WI 53018
844-494-3363

www.roadwidenerllc.com
info@roadwidenerllc.com